

New Product Announcement

M110R2601SE, M110R2604SE Starter Motor

M110R Starter	Sales #	Volts	Output	Warranty	OCP	Pinion Details			
						Teeth	Pitch	OD	PAR
M110R2601SE	M110601	12V	7.0 kW	1 Year	No	12	Mod 3	43.97	47.6
M110R2604SE	M110604	12V	7.0 kW	3 Years	Yes	12	Mod 3	43.97	47.6



Part Number	Sales Number	Engine	Application Info.	Delco Cross M110R2601SE	Delco Cross M110R2604SE (OCP)	Mitsubishi
M110R2601SE	M110601	MBE4000	Freightliner Sterling Western Star	19011514	19011525	MIB971179
M110R2604SE	M110604			8200084	8200082	MIB971179FL
				8300013	8300008	FL1179
				8200434	8200287	


Note: In some instances the starter flange may need to be relocked

All M110R starters have IMS/ soft start relay.

Maximum engine displacement 14L


M110R2604SE can substitute non-OCP starters.

Mountings




ALTERNATIVE MOUNTINGS		
FLANGE POSITION		
POS	ANGLE X	REMARKS
1	45°	AS SUPPLIED
2	90°	Requires 30° OCP
3	135°	Requires 120° OCP
4	180°	Requires 180° OCP
5	225°	Requires 240° OCP
6	270°	Requires 270° OCP
RELAY POSITION		
POS	ANGLE Y	REMARKS
A	90°	Requires 180° OCP
B	45°	Requires 135° OCP
C	0°	Requires 90° OCP
D	-45°	Requires 45° OCP
E	-90°	AS SUPPLIED

Rear Dimensional



Only M110604 has OCP

Side Dimensional

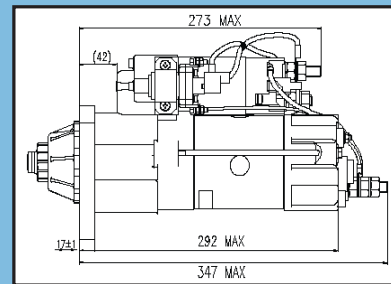

For more information
contact your sales representative

Celebrating 100 Years • 1911-2011

Marketing Information

Prestolite
Leece-Neville